


HFT

Heated Floor Thermostat – 3 phase AC load

The HFIT is a two-zone Heated Floor Intelligent Thermostat specially designed to control temperature with different setpoints in a railway car. In case of a ground fault, the HFT will automatically disconnect the power and activate the fault status output.

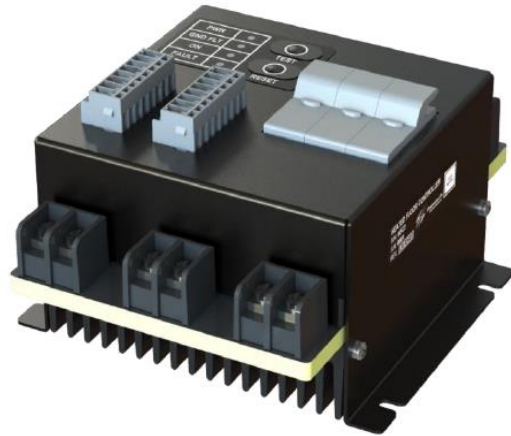

HFT1 shown

HIGHLIGHTS

- Heater fault detection
- 1 or 2 sensors per zone
- LED display for quick diagnostic

MODELS & FEATURES

Part Number Base	HFT
Operating Voltage	37.5V _{DC}
Nominal Source/Load Voltage	480V _{AC} 3 phases
Low power CAB option	
Max Source/Load Current	3.5A per phase
Current Leakage Threshold	F
Width X Height X Depth 6.440" X 7.250" X 4.117"	X

X = Included, O = Optional, F = Factory Configurable

APPLICATION DIAGRAM

